



Better curved lock







Super light and slim



Fast maintenance



Professional design for stage

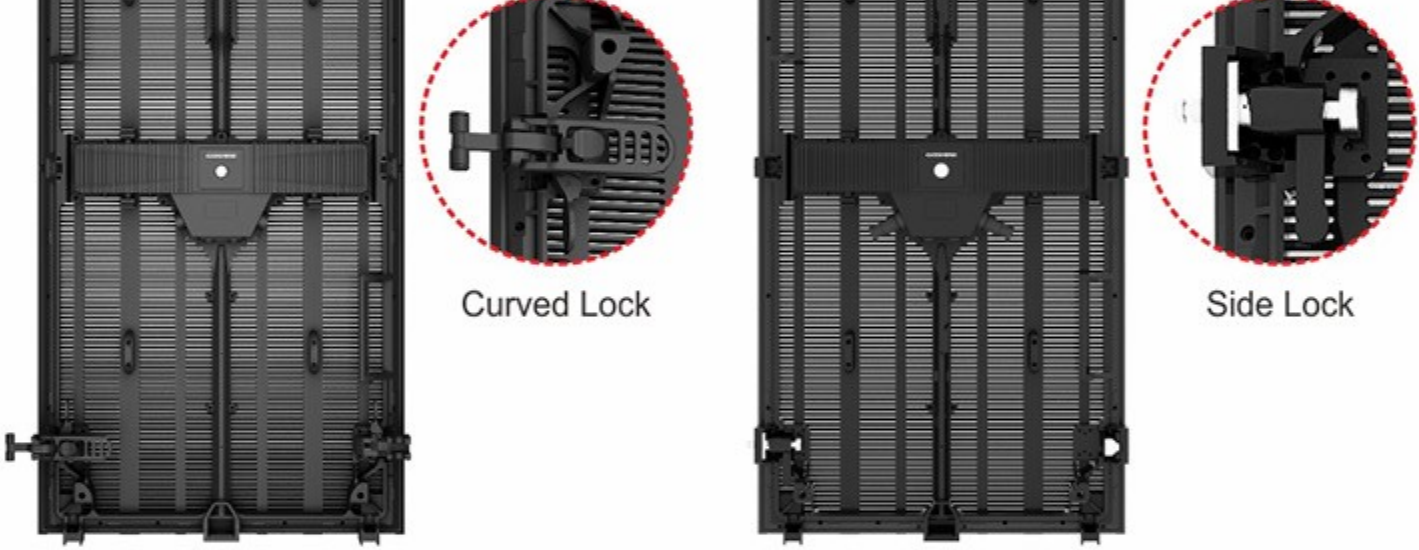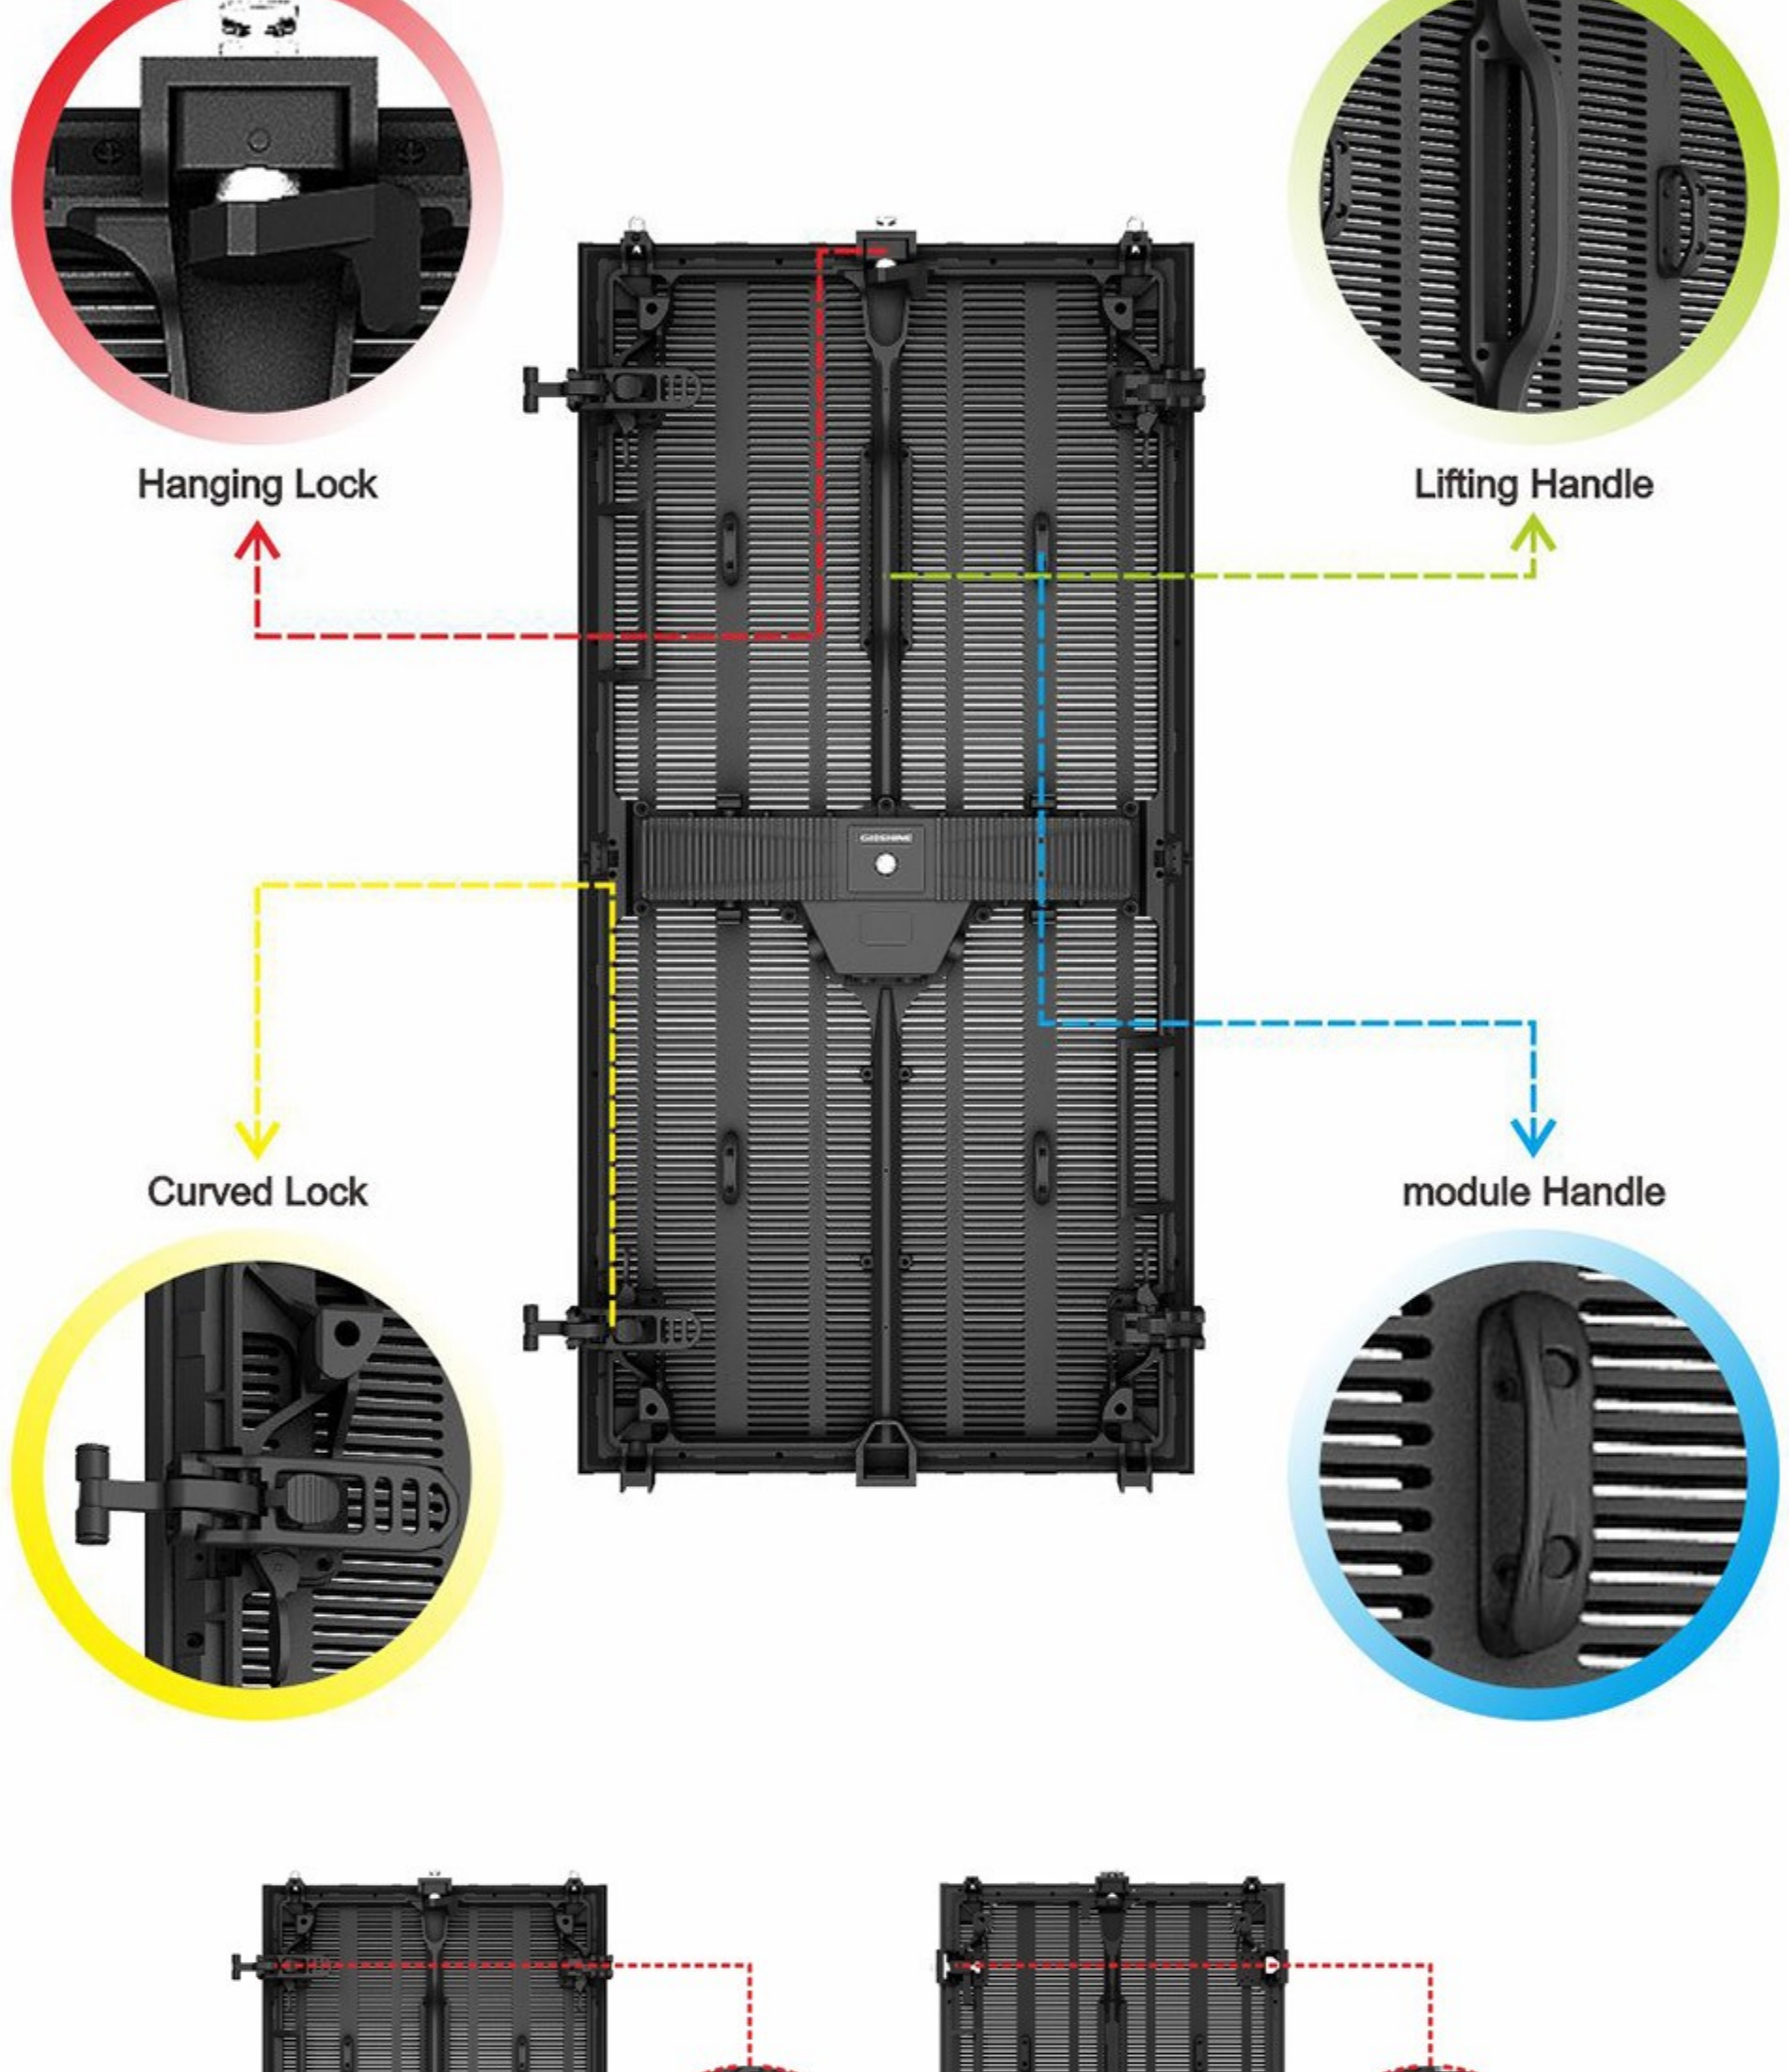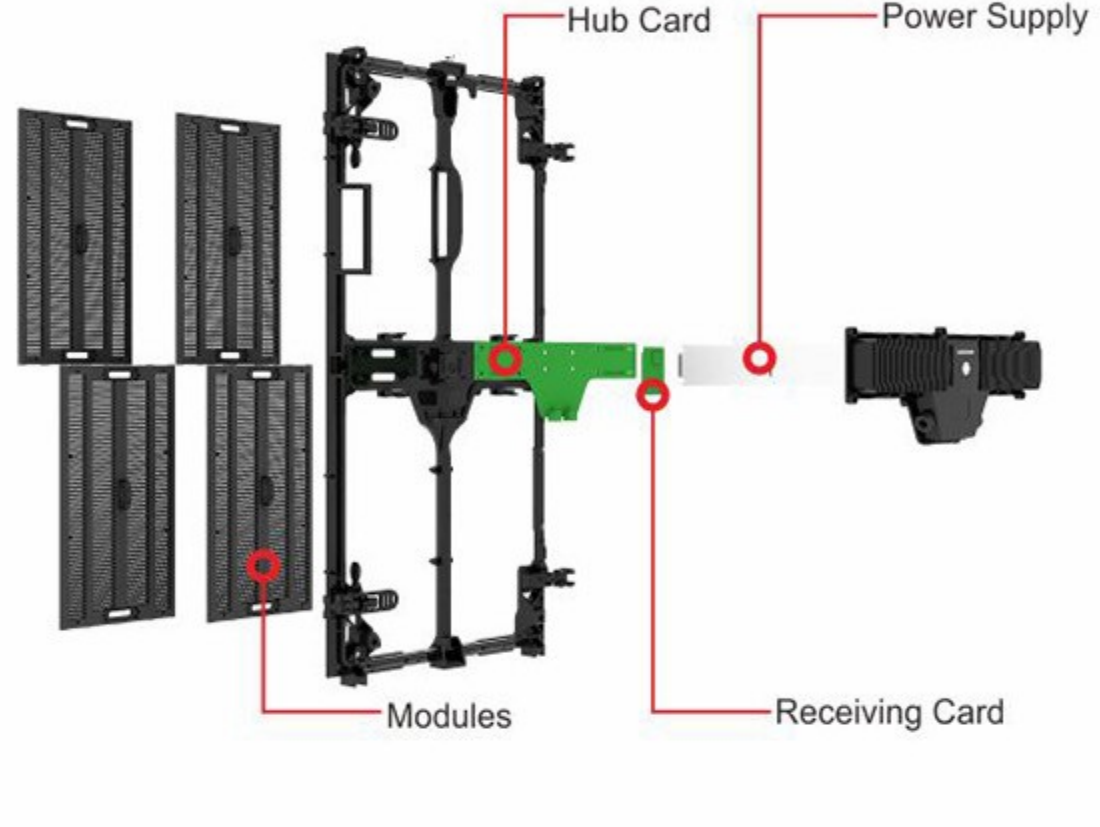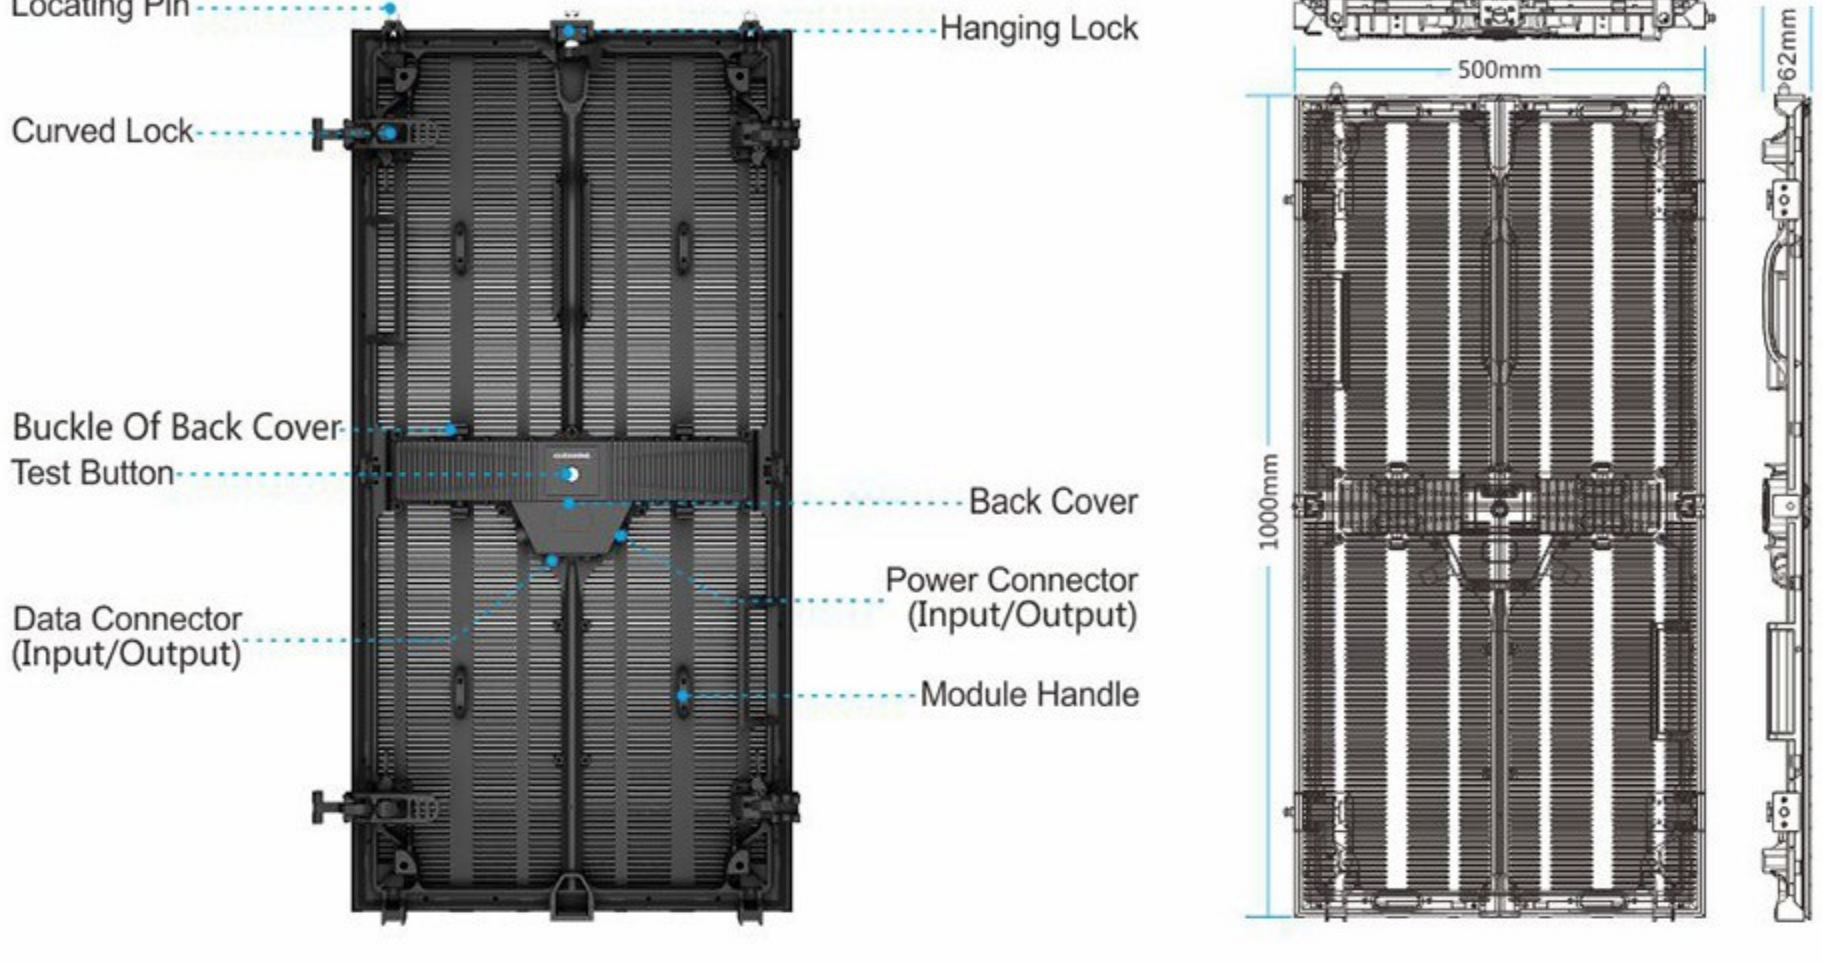

Zebra series has two kinds of cabinet versions , straight and curved cabinet.



Support 90 degree Assembling




Hanging Installation
Max 8 meters high




Stacking Installation
Max 8 meters high


Actual ground support system may differ from image

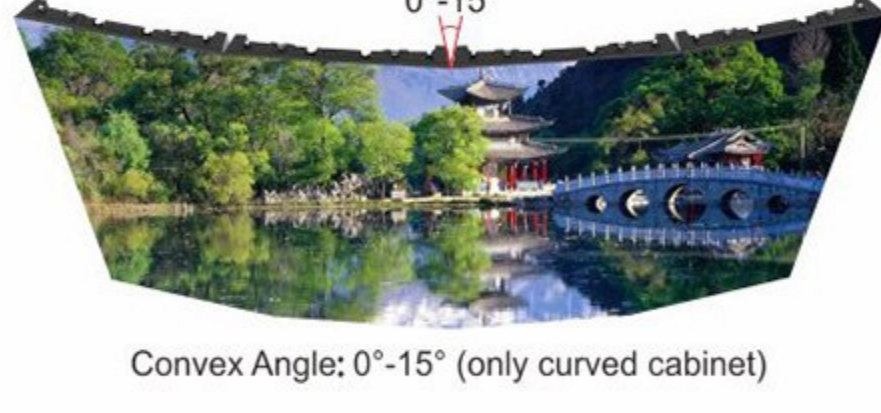

Convex Angle: 0°-15° (only curved cabinet)

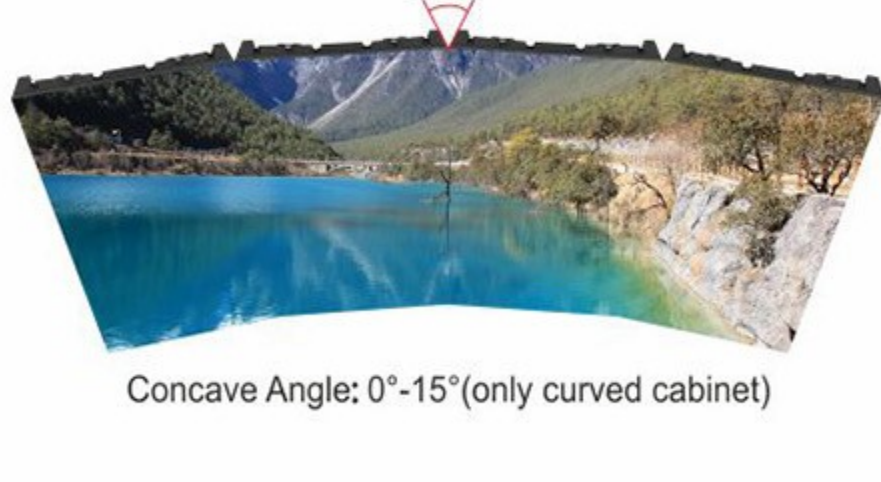

Concave Angle: 0°-15°(only curved cabinet)

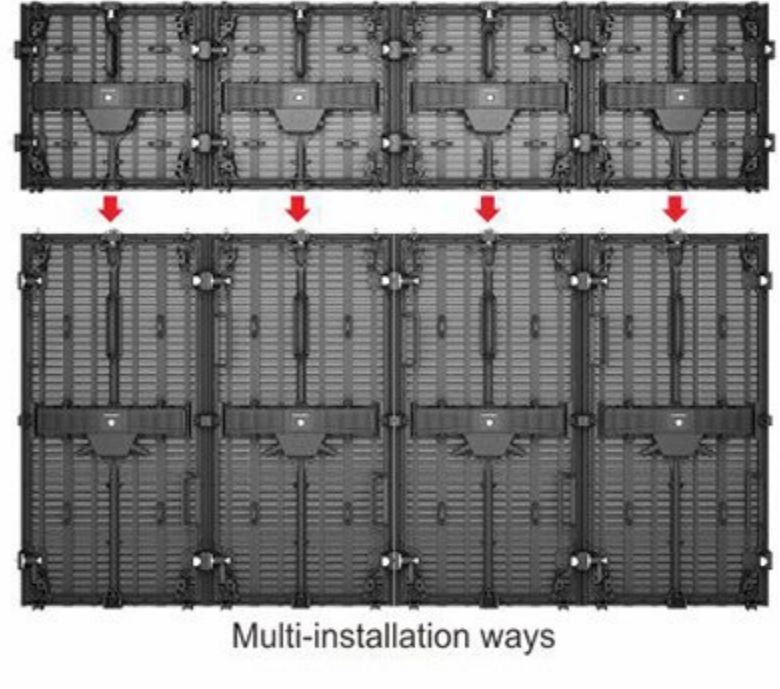

Multi-installation ways




<Fast maintenance>


To adapt to a variety of installation environment, fast maintenance, improve operating efficiency.



X 6Pcs

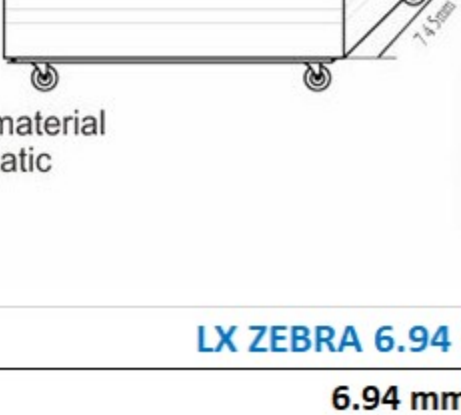

- Loading: 6 pcs in 1
- Safety and reliable
- Strong loading
- Eco-friendly material
- Anti-electrostatic

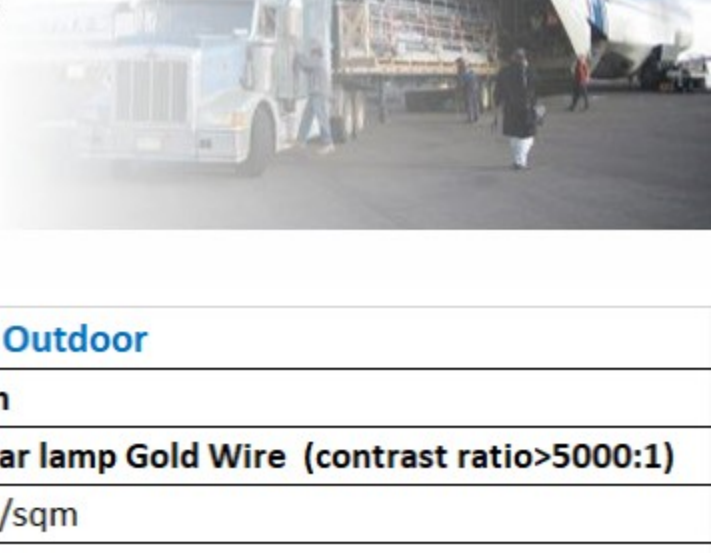

Model	LX ZEBRA 6.94 Outdoor
Pixel Pitch	6.94 mm
LED encapsulation mode	SMD1921 SMD1921 high brightness LED Nationstar lamp Gold Wire (contrast ratio>5000:1)
Resolution	20736 pixels/sqm
Cabinet Dimension(W x H)	500*1000*62mm
Cabinet Resolution	72*148pixels
Cabinet Material	Die-Casting Aluminum Alloy
Cabinet Weight	8,0KG
Driver IC	Macroblock MBI5252
Refresh Rate	≥3840Hz (flicker free) high refresh rate ,without any scan line under the TV & Camera
Grey Scale	14-16bit
Best View Distancing	>6m
Viewing Angle	140° horizontal and 120° vertical
Brightness	1200 / 2500nits
IP rating	Front IP65, Rear IP54
Brightness Adjustment	Manual, 256 level; Auto, 8 levels
Power Consumption	Max: 700w/sqm; Average: 350w/sqm
Way of Drive	1/21 scan
LEDs Lifetime	up to 50,000 Hours
Operating Voltage	AC200-240V,50-60Hz high efficient power supply Megmeet Natural cooling,ZERO Noise
Frame Rate	> 60 frames/sec
Blind Spot Rate	≤0.0001
Humidity	10%-90% RH
Control Method	Synchronized with computer monitor, and other input system
MTBF	> 10,000 hours
Color Temperature	Brightness of R/G/B adjustable by the software 256 grades,color temperature adjustable
Support Mode	VGA, 1,280*1,024 display synchronically with the computer, correspondence dot to dot
Control Distance	CAT 5 network cable 100 m (no repeating); Optical fiber transmission: 500m- 10km
Curvable(Optional)	-7°~+7°