
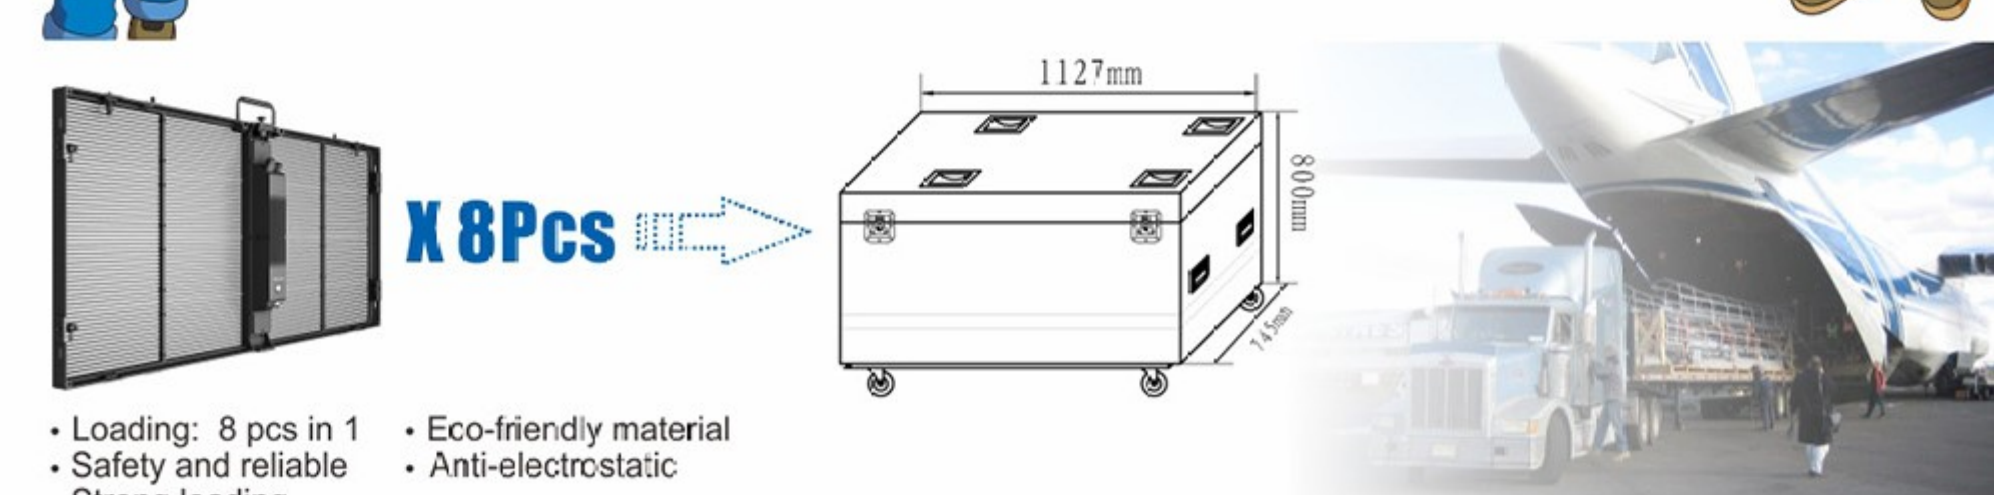
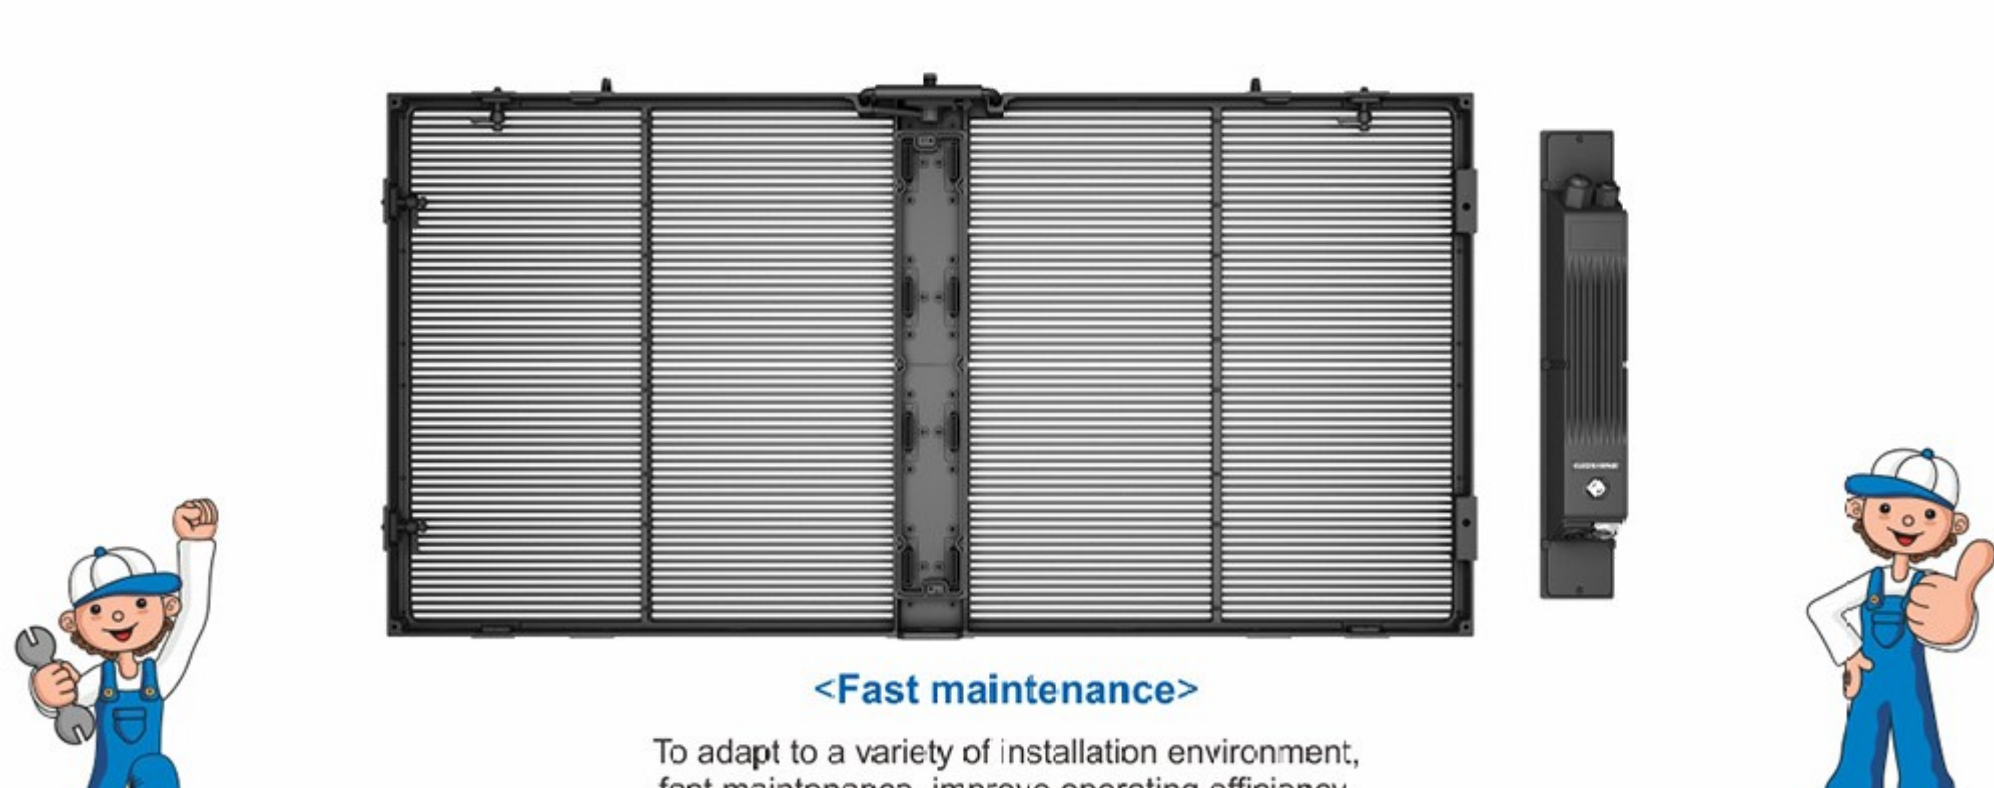
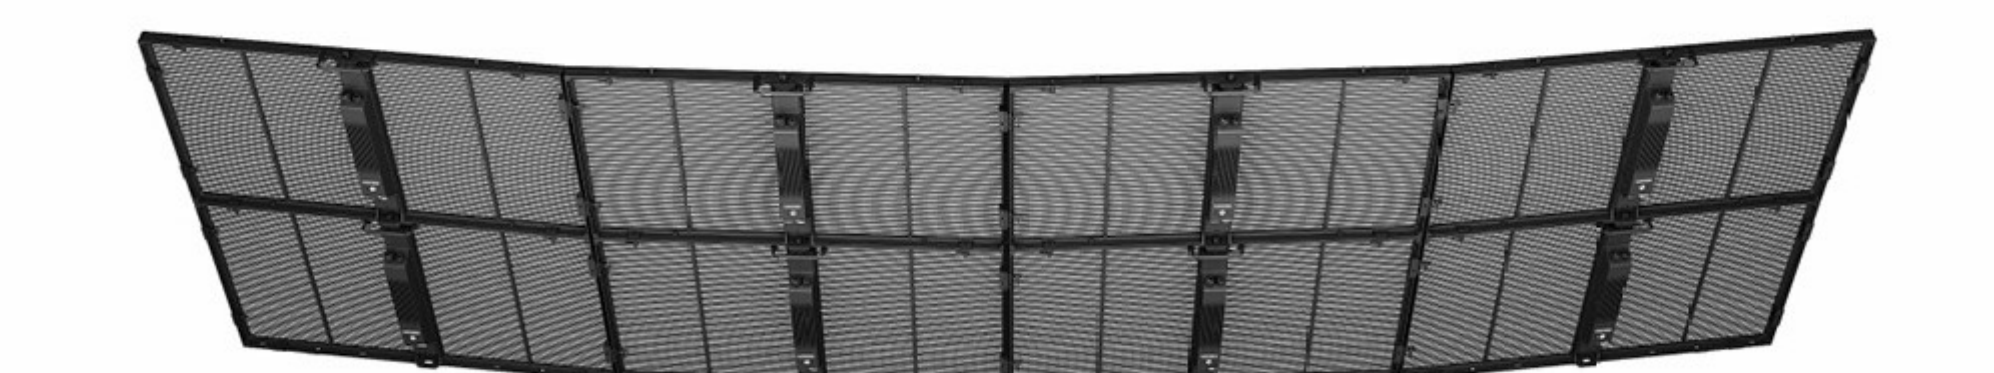
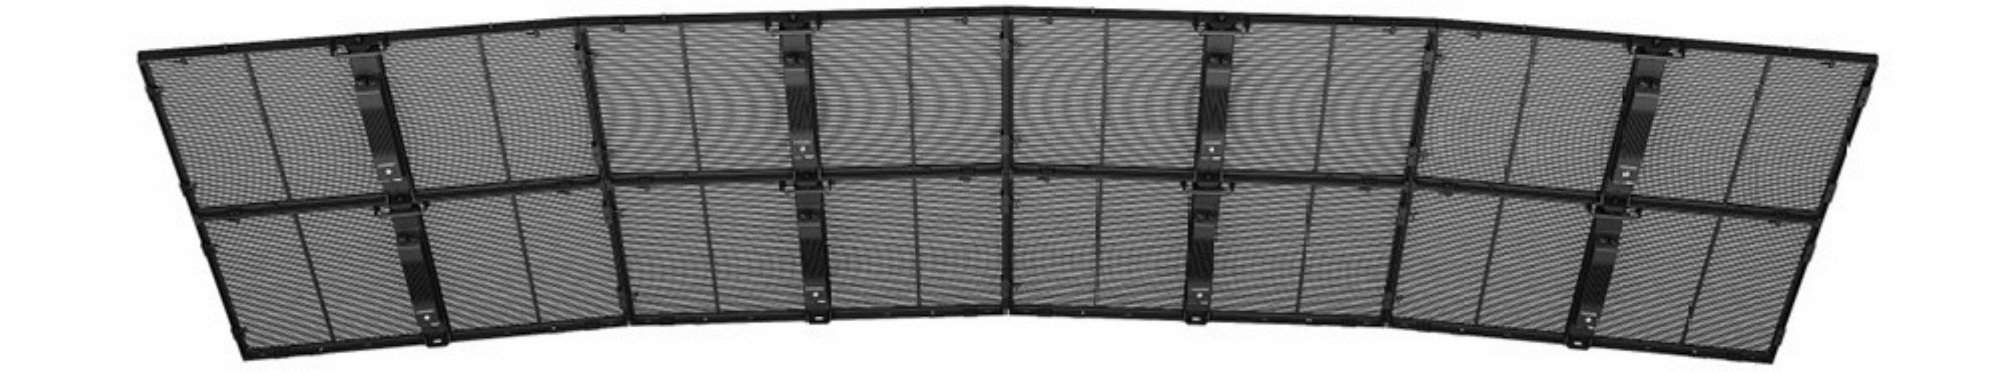
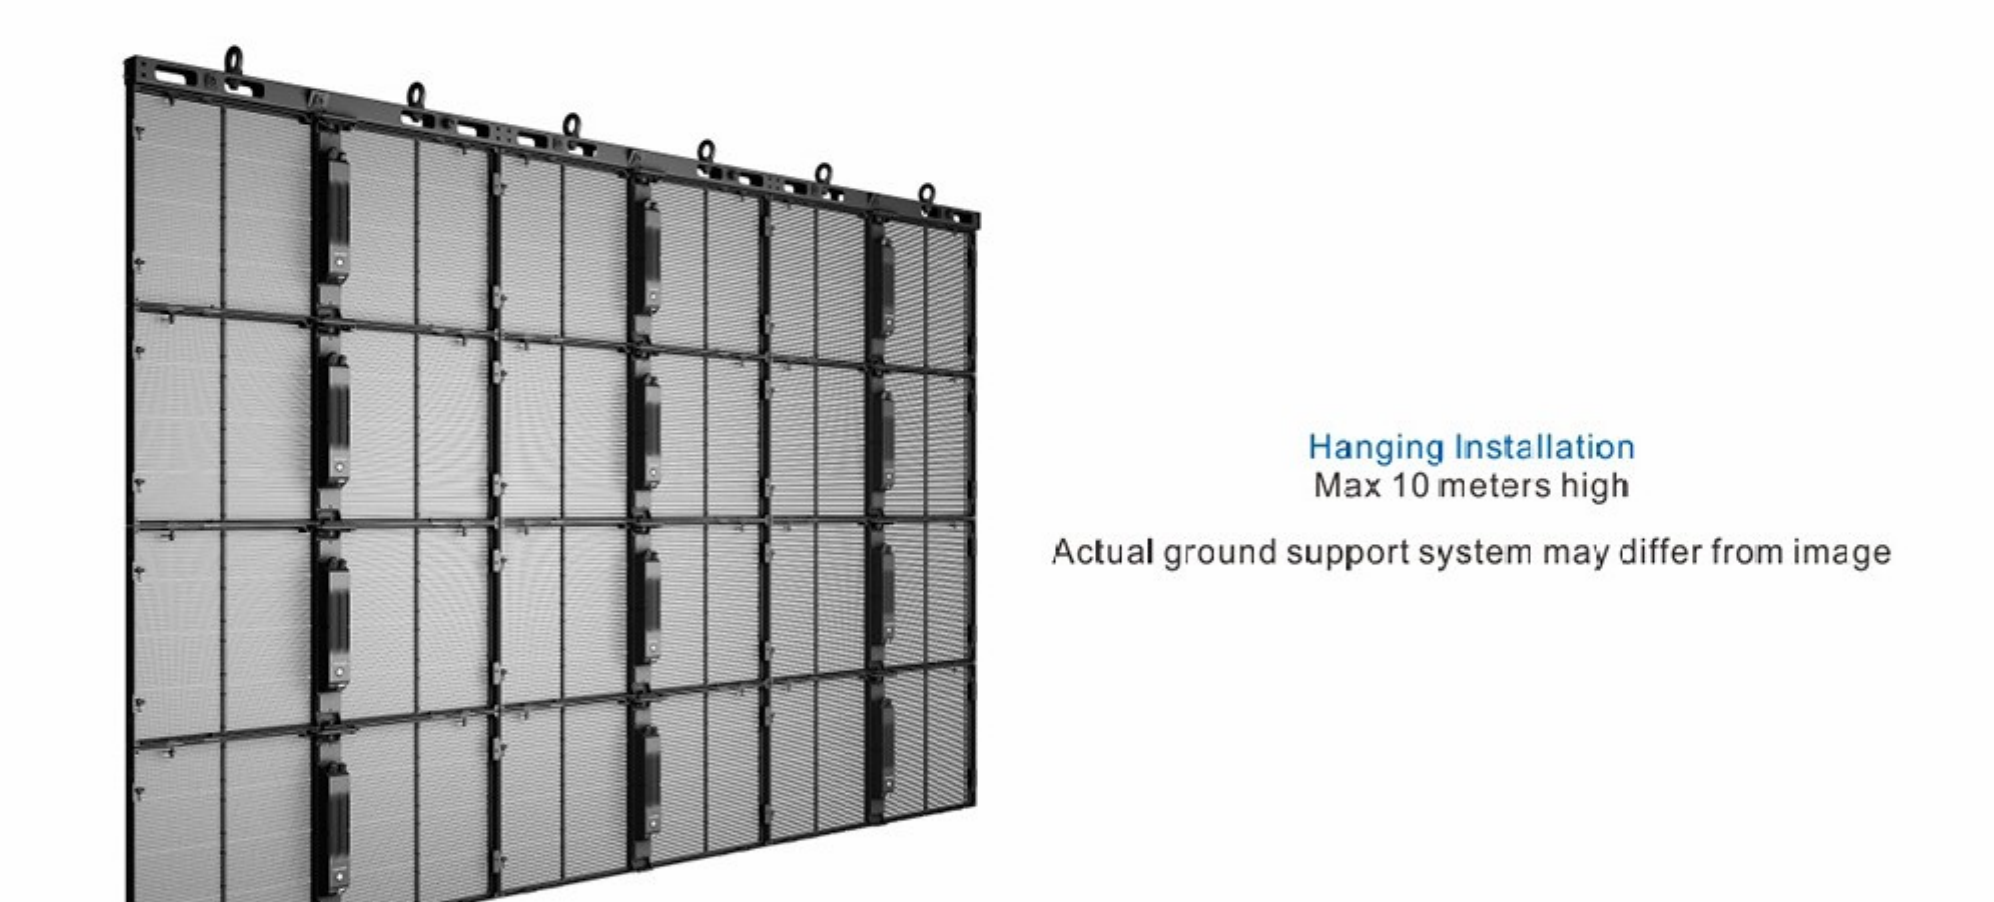
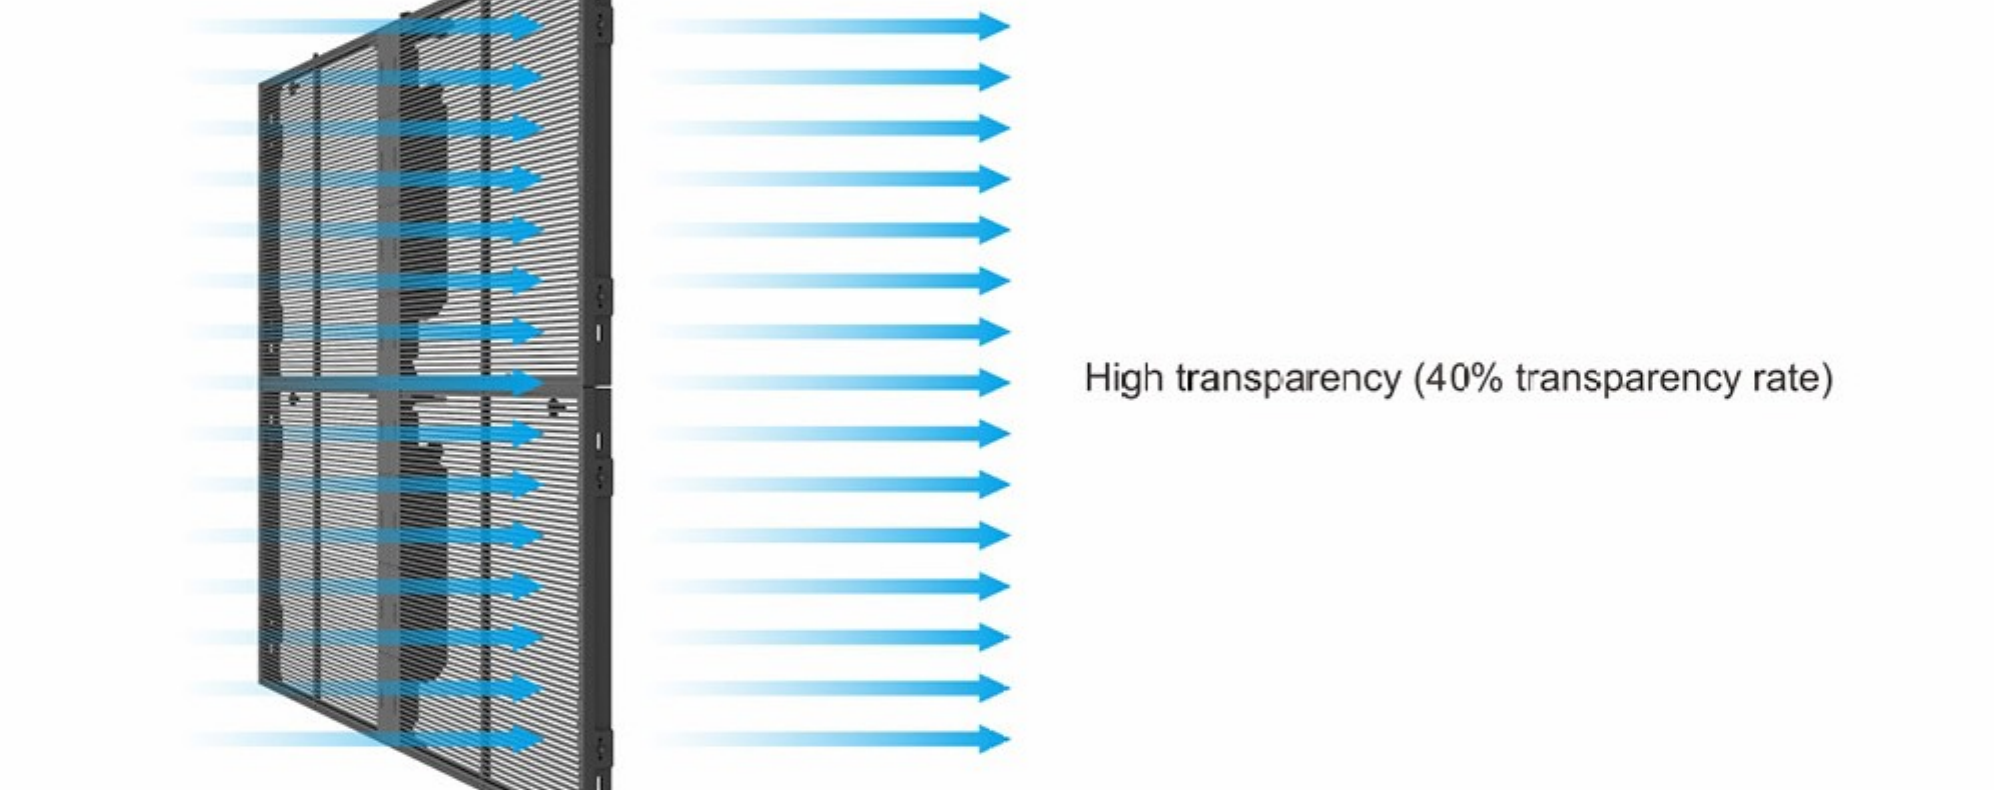
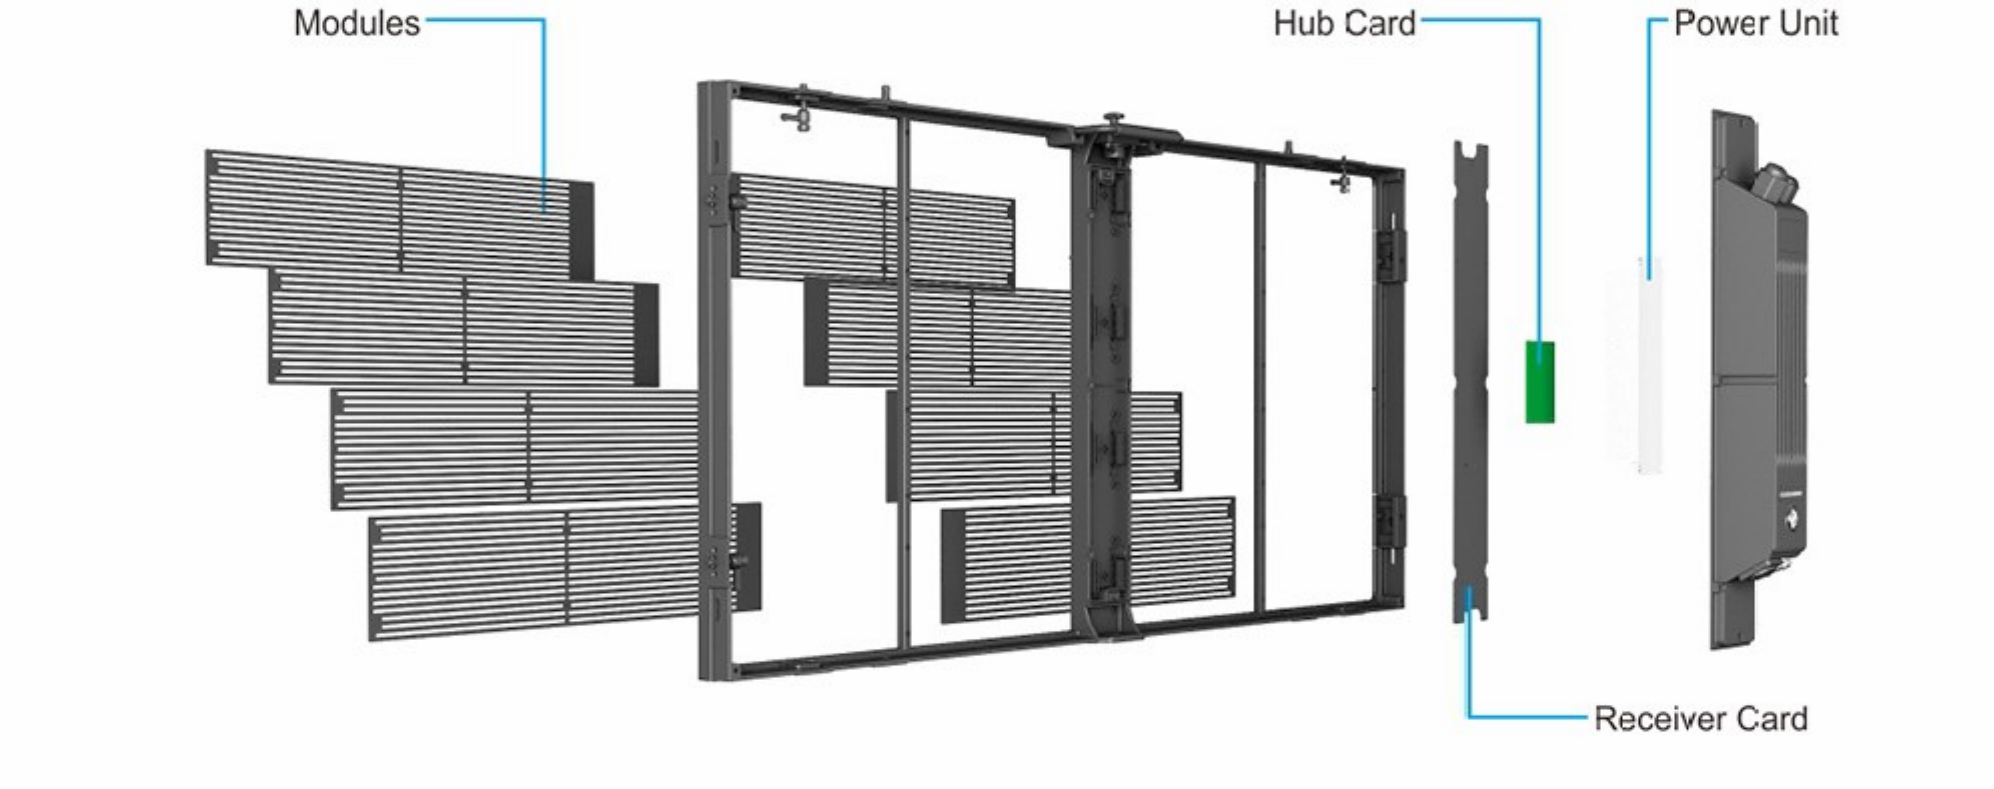
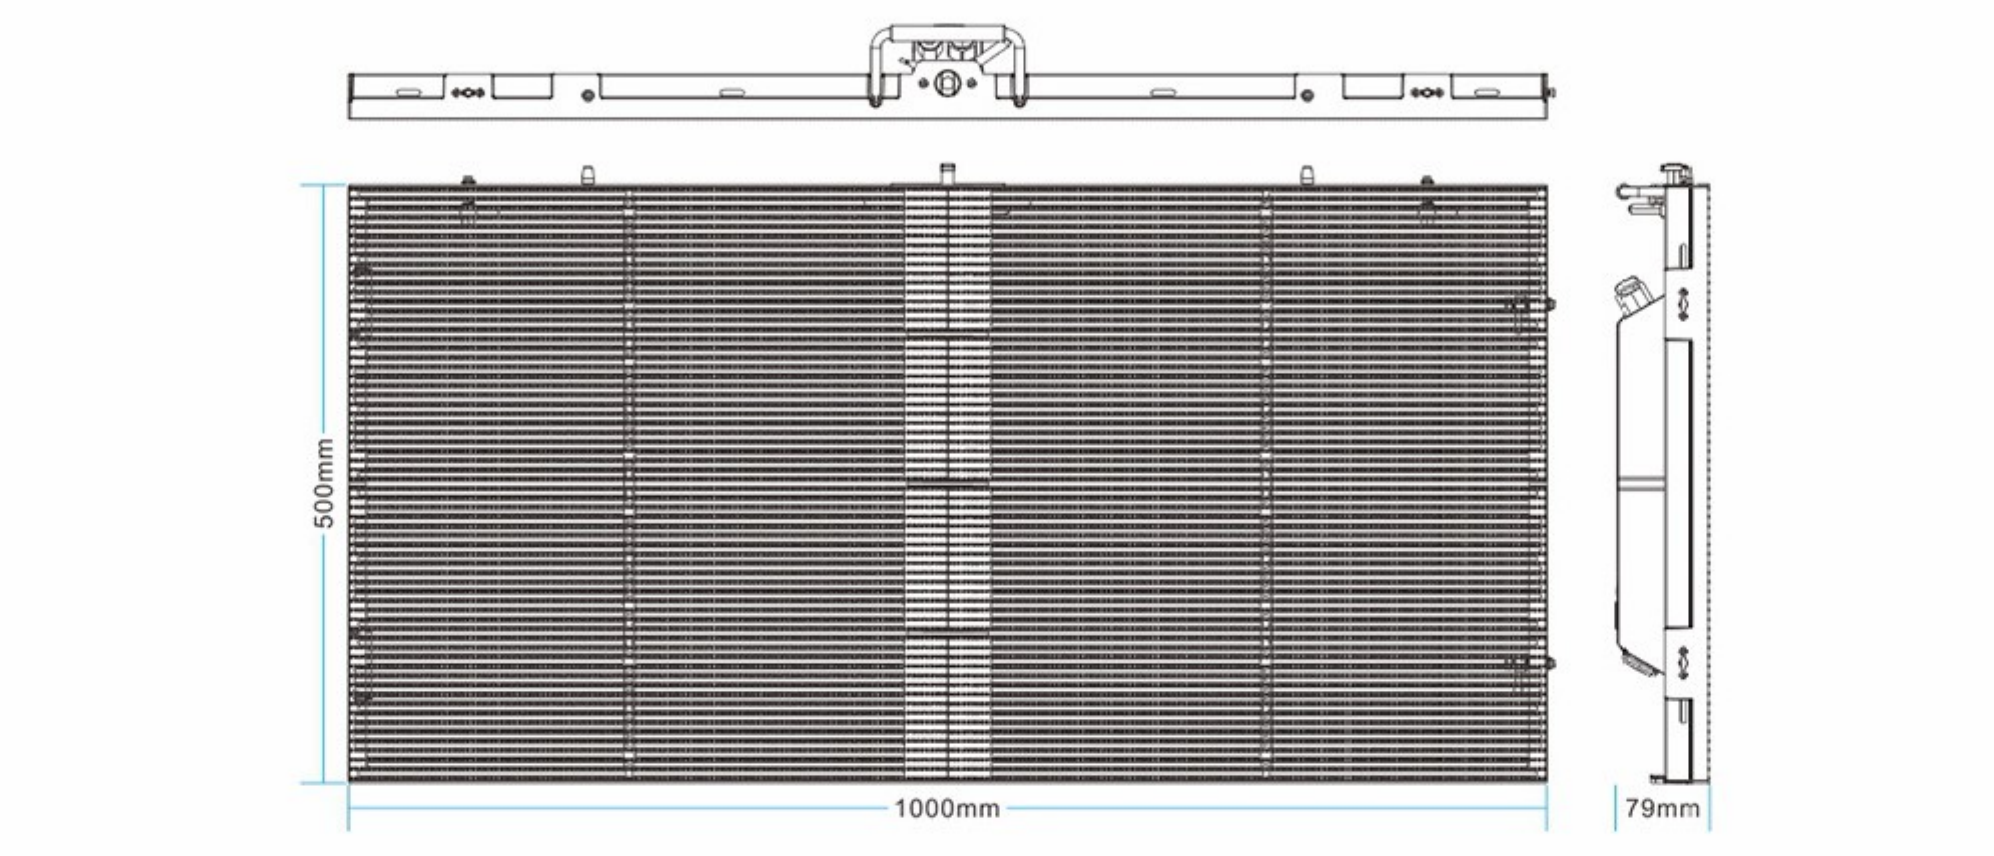


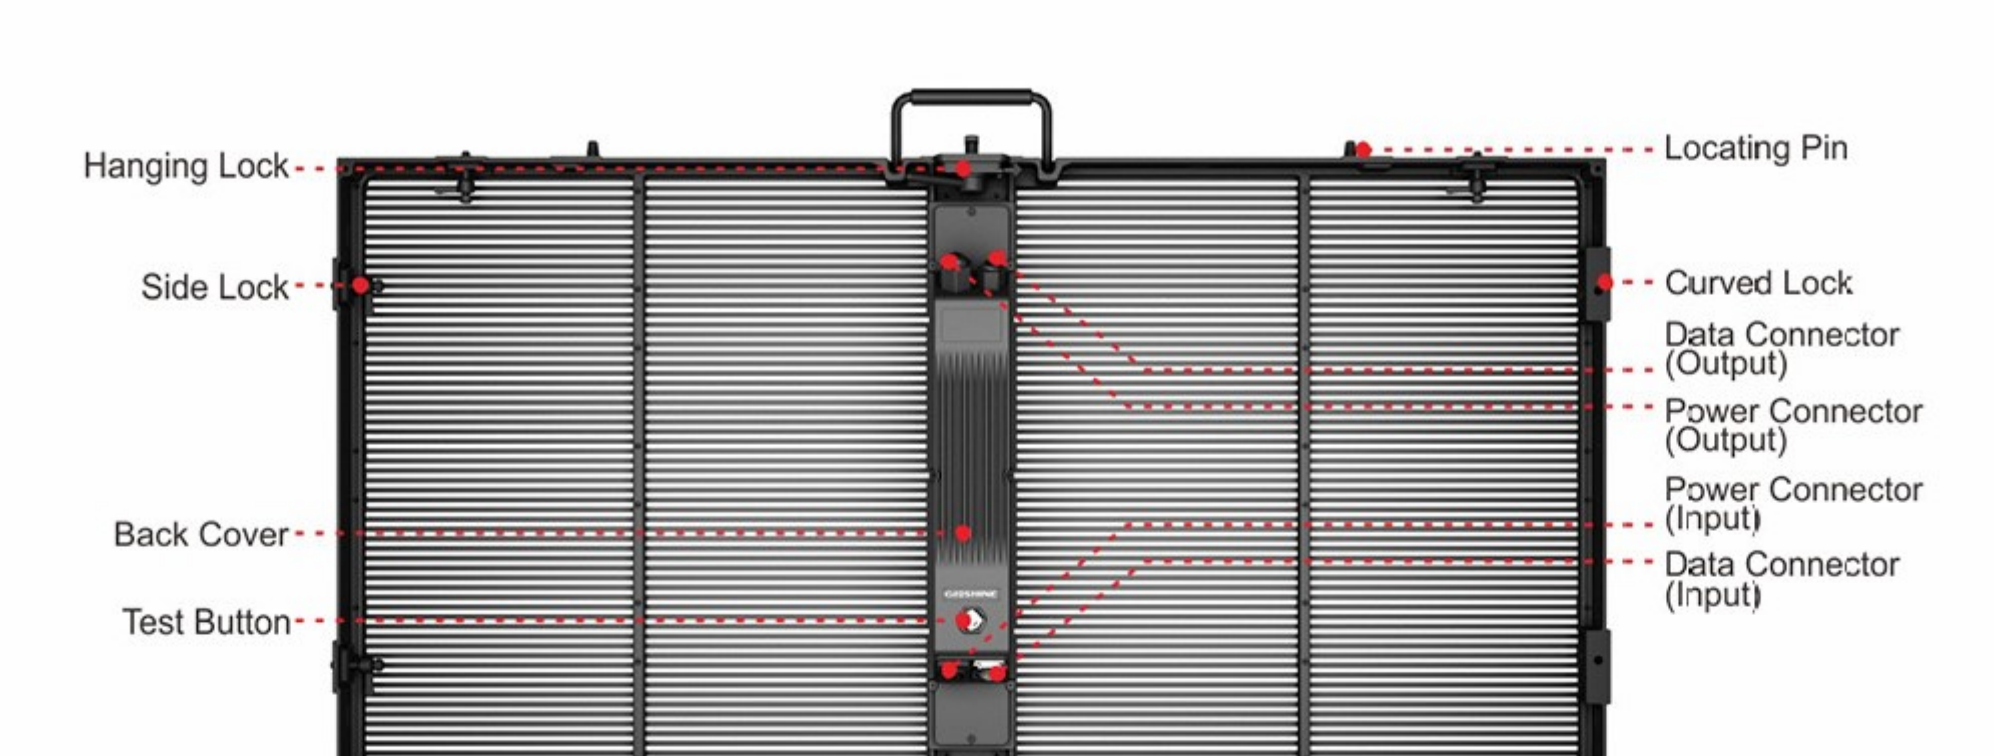

Model	LX LC 3.91-7.81 Indoor	LX LC 3.91-7.81 Outdoor
Pixel Pitch	3.91-7.81 mm	
LED encapsulation mode	SMD2020 anti-glare black leds Gold Conductive Wire	SMD1921 high brightness Led Gold conductive wire
Resolution	32768 pixels/sqm	
Cabinet Dimension(W x H)	1000*500*80mm	
Cabinet Resolution	256*64pixels	
Cabinet Material	Die-Casting Aluminum Alloy	
Cabinet Weight	5,80 KG	
Driver IC	Macroblock MBI5153	Macroblock MBI5252
Refresh Rate	≥3840Hz (flicker free) high refresh rate ,without any scan line under the TV & Camera	
Grey Scale	14-16bit	
Best Viewing Distancing	>4m	
Viewing Angle	160° horizontal and 160° vertical	
Brightness	600-800nits	2000-3000nits
IP rating	IP30	IP54
Brightness Adjustment	Manual, 256 level; Auto, 8 levels	
Power Consumption	Max: 380w/sqm; Average: 190w/sqm	Max: 400w/sqm; Average: 200w/sqm
Way of Drive	1/16 scan	
LEDs Lifetime	up to 50,000 Hours	
Operating Voltage	AC200-240V,50-60Hz high efficient power supply Megmeet Natural cooling,ZERO Noise	
Frame Rate	> 60 frames/sec	
Blind Spot Rate	≤0.0001	
Humidity	10%-90% RH	
Control Method	Synchronized with computer monitor, and other input system	
MTBF	> 10,000 hours	
Color Temperature	Brightness of R/G/B adjustable by the software 256 grades,color temperature adjustable	
Support Mode	VGA, 1,280*1,024 display synchronically with the computer, correspondence dot to dot	
Control Distance	CAT 5 network cable 100 m (no repeating); Optical fiber transmission: 500m- 10km	
Curvable (Optional)	-5°~+5°	