



LEGEND SERIES

Legend(LE)






500X1000




Upgrade of classic design

Legend series still keeps the concise and great momentum style; it adopts modular design and also the benchmark of industrial design.

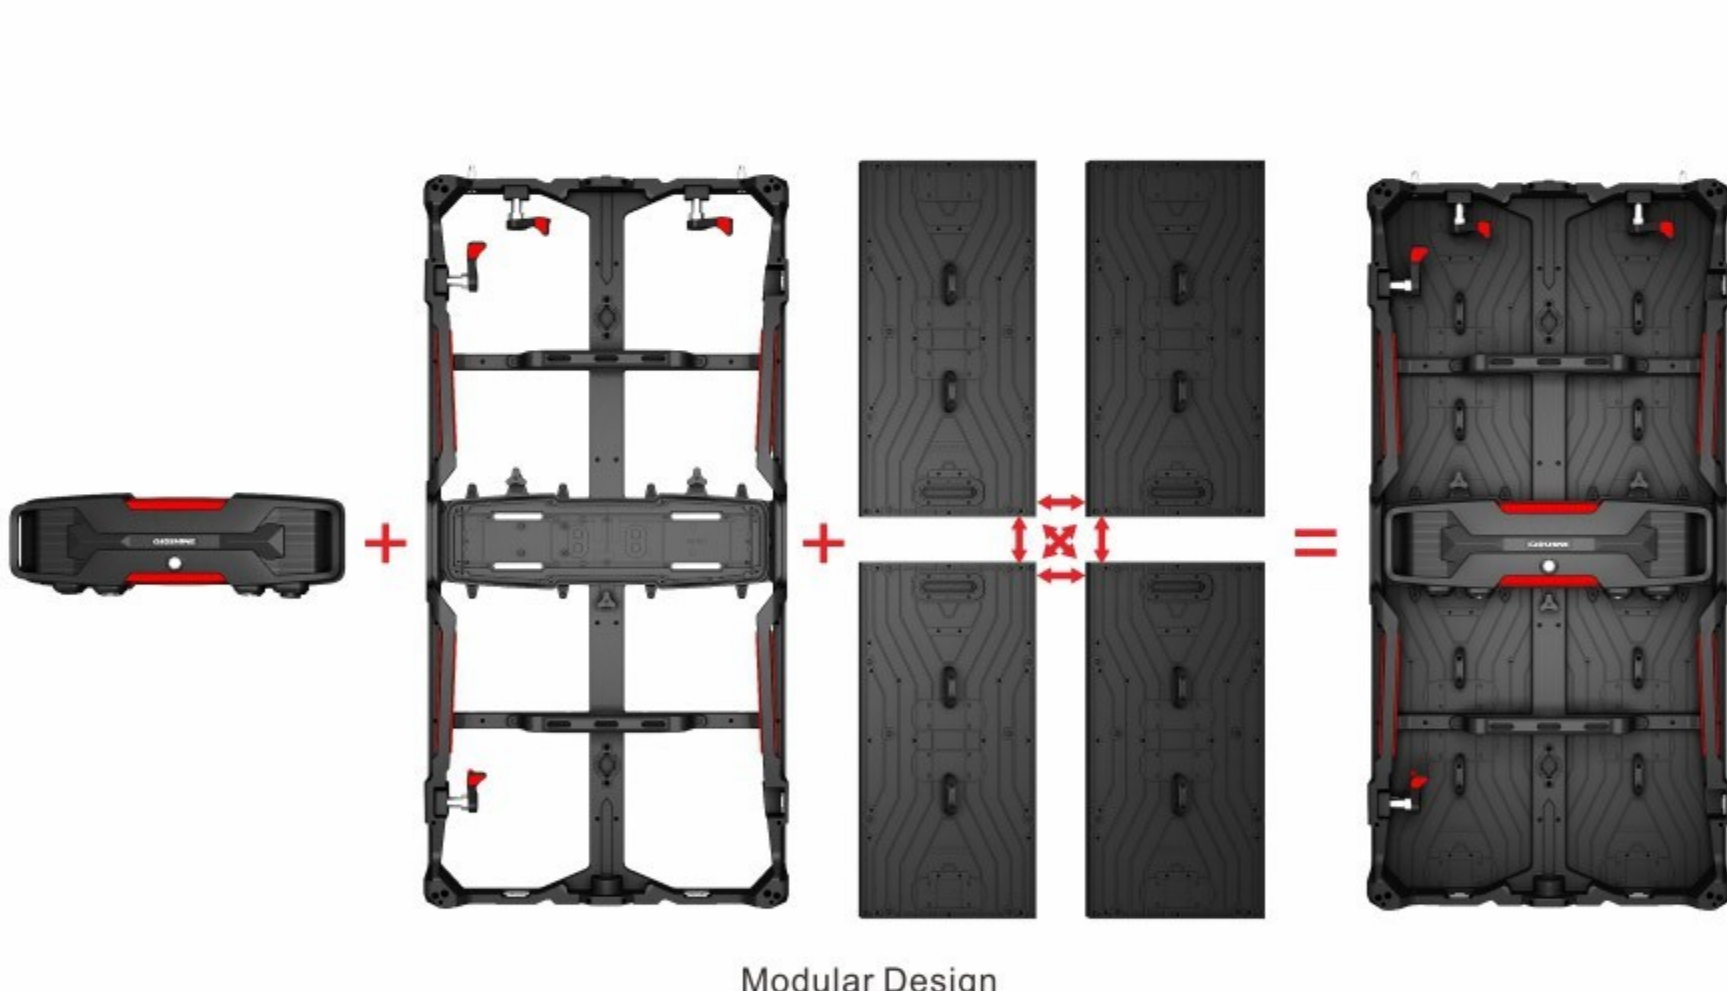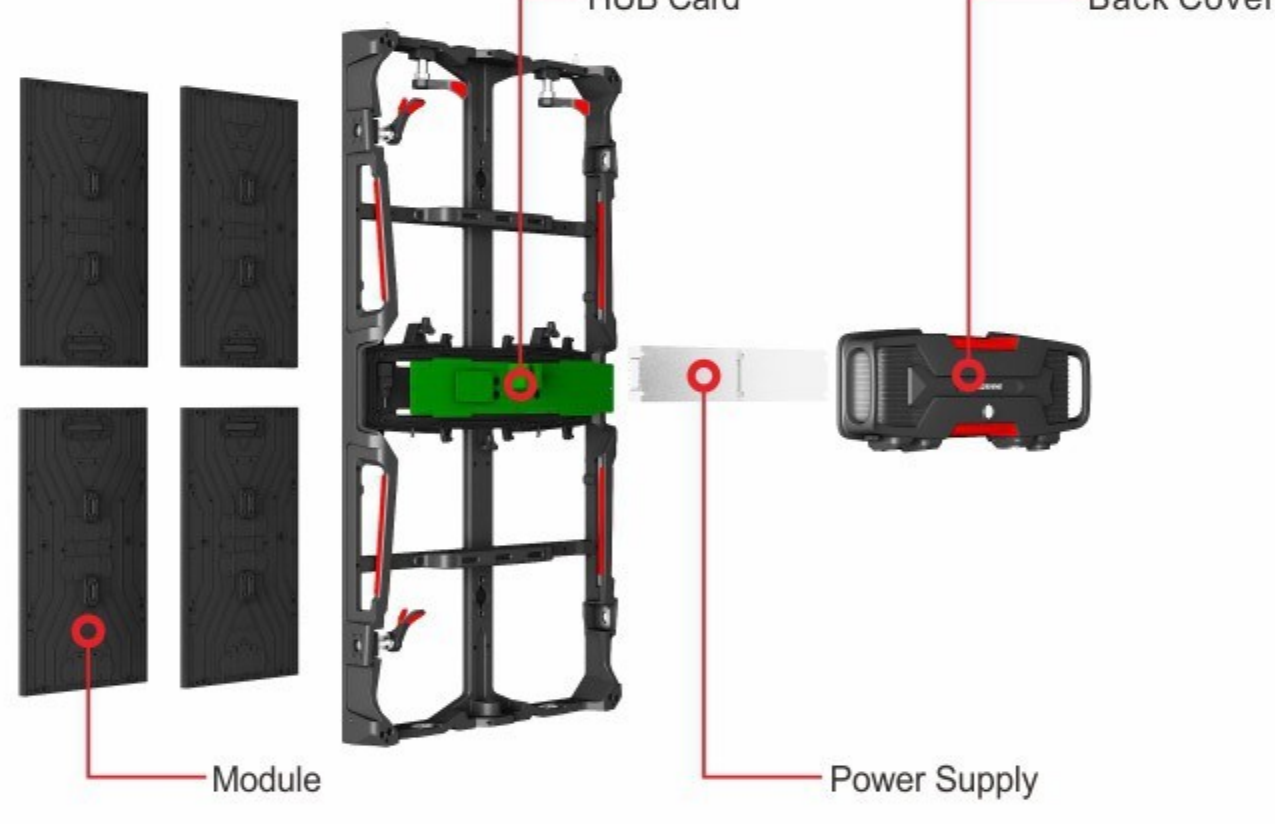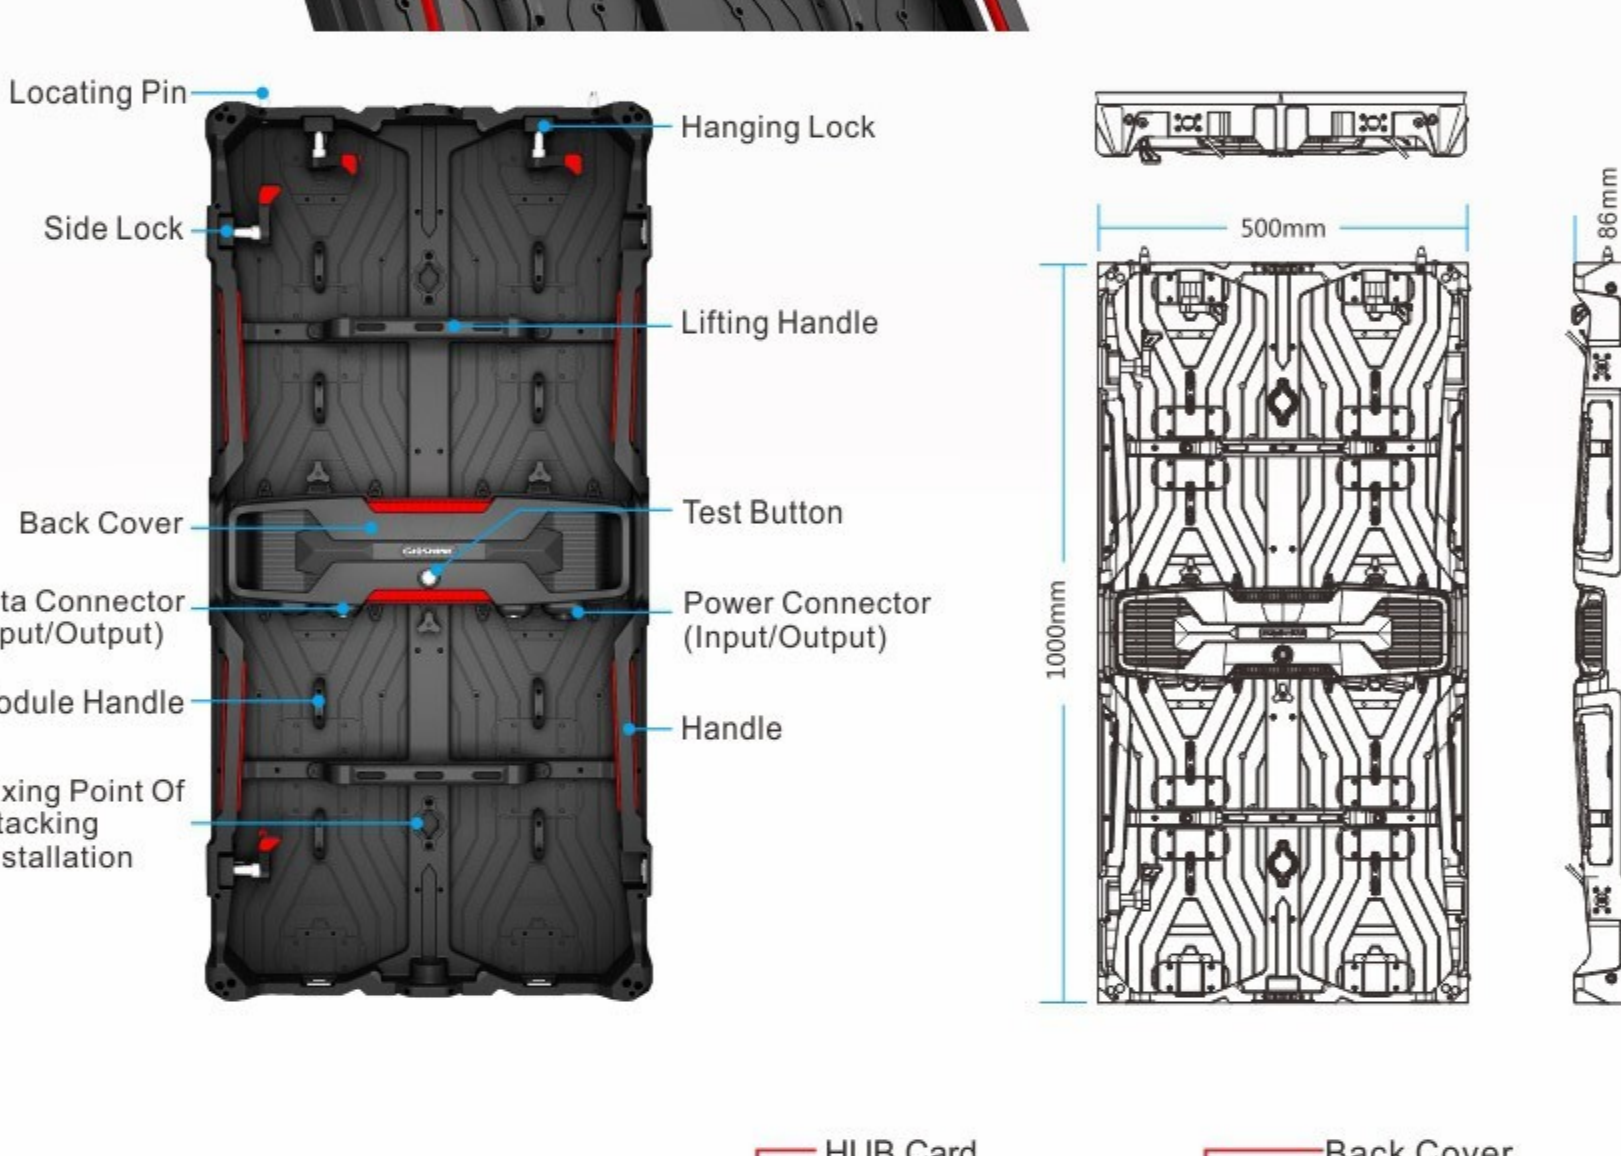


Modular Design

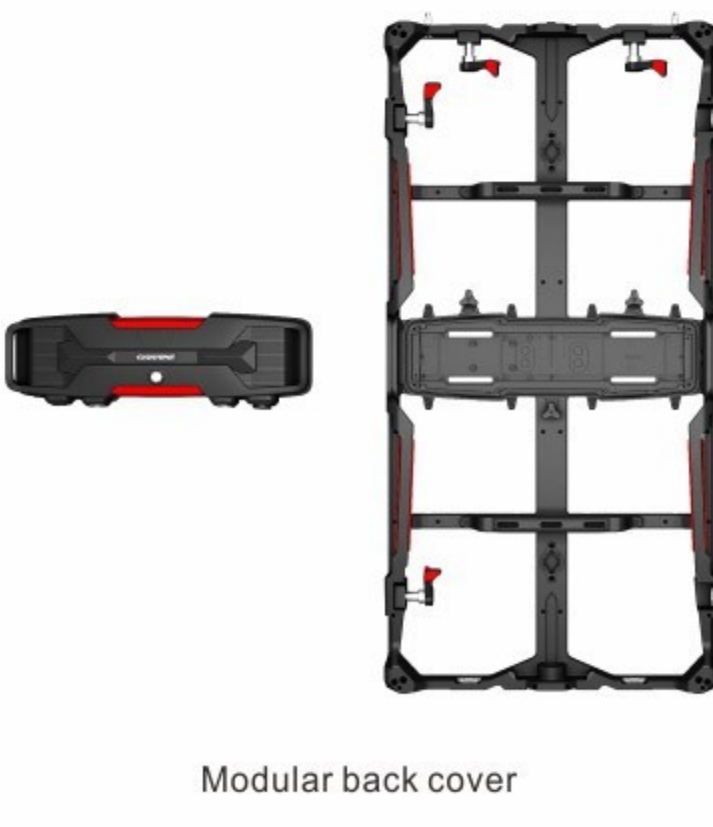

Modular back cover




Interchangeable module

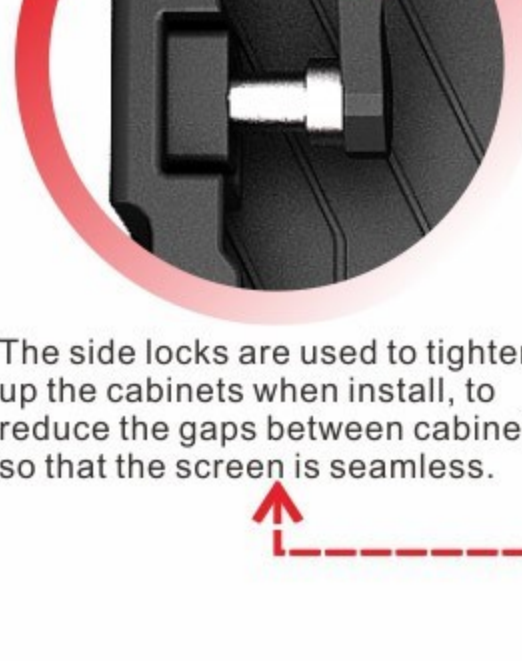


The side locks are used to tighten up the cabinets when install, to reduce the gaps between cabinets, so that the screen is seamless.



Cabinet handles are big and user-friendly. Installation is one-person job, which saves time and labor significantly.

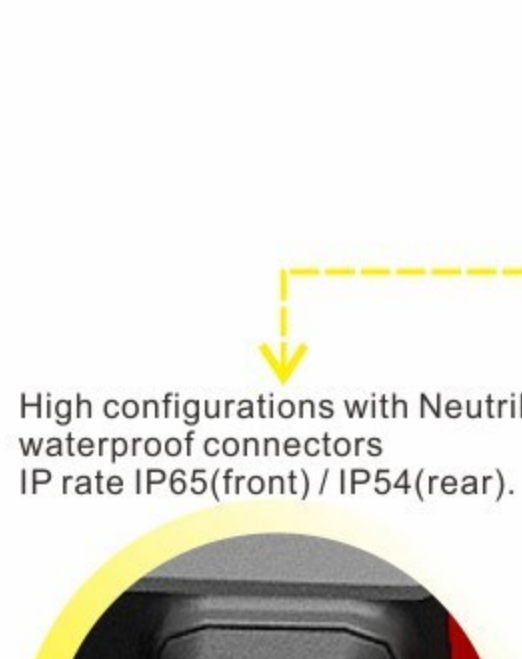

High configurations with Neutrik waterproof connectors IP rate IP65(front) / IP54(rear).

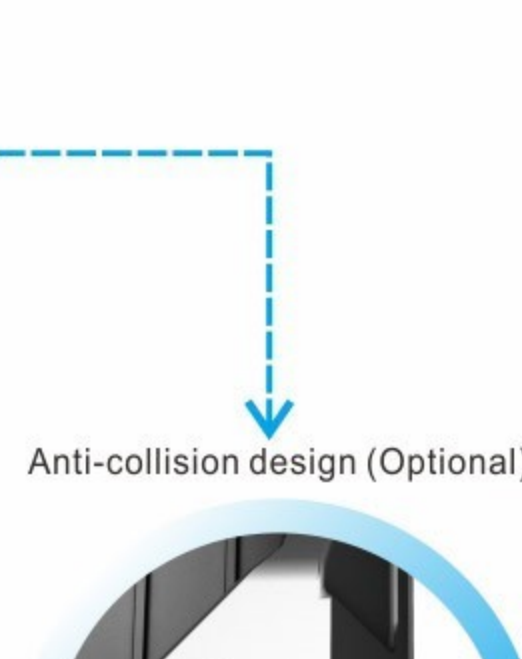

Anti-collision design (Optional)




Side Lock




Curved Lock

Legend series has two kinds of cabinet versions , straight and curved cabinet.

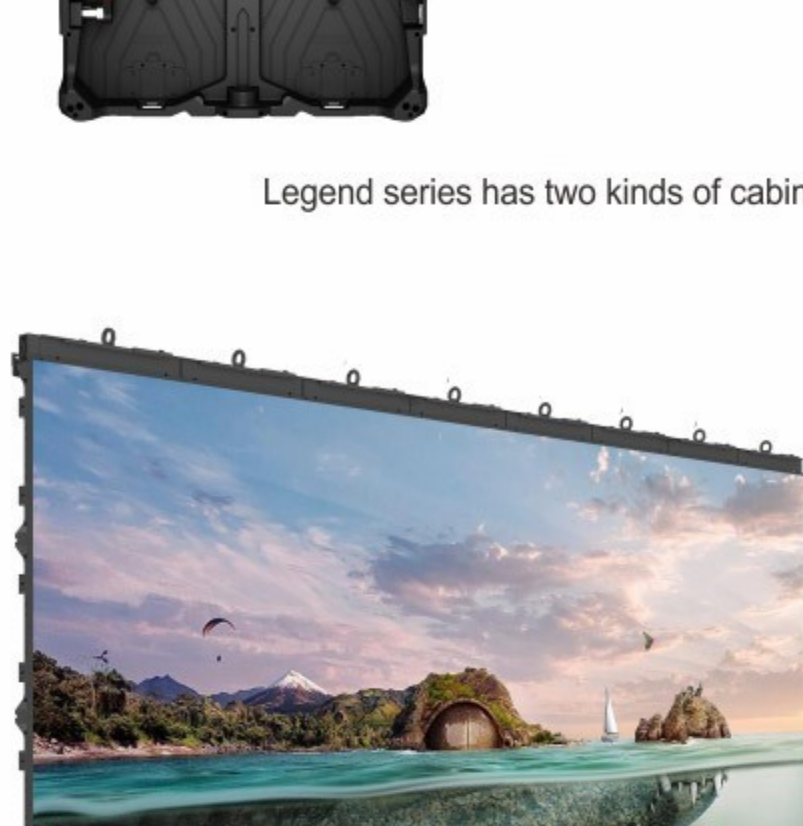


Hanging Installation
Max 12 meters high

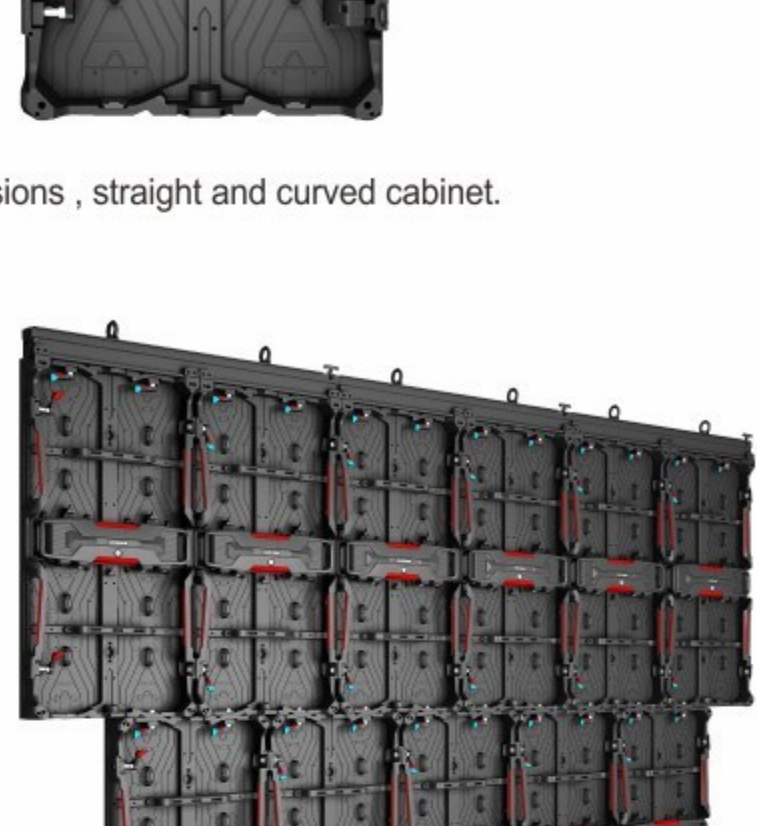


Stacking Installation
Max 12 meters high

Actual ground support system may differ from image

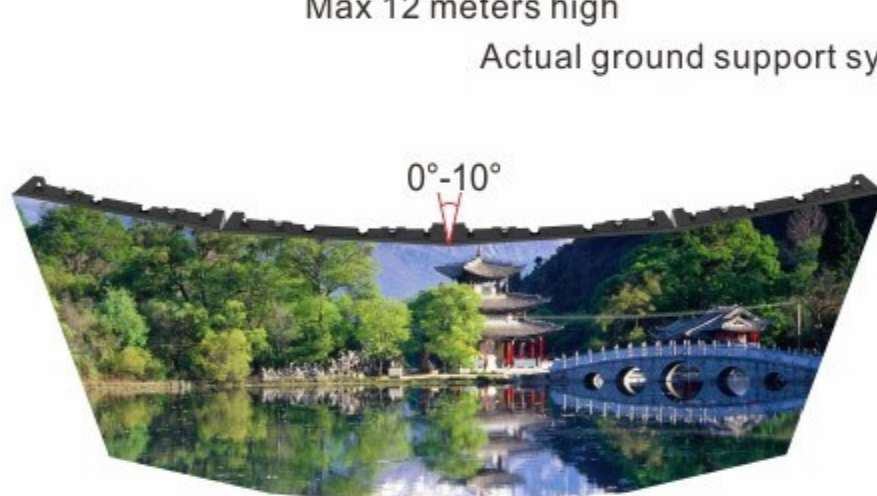

Convex Angle: 0°-10° (2.5°/pcs, only curved cabinet)

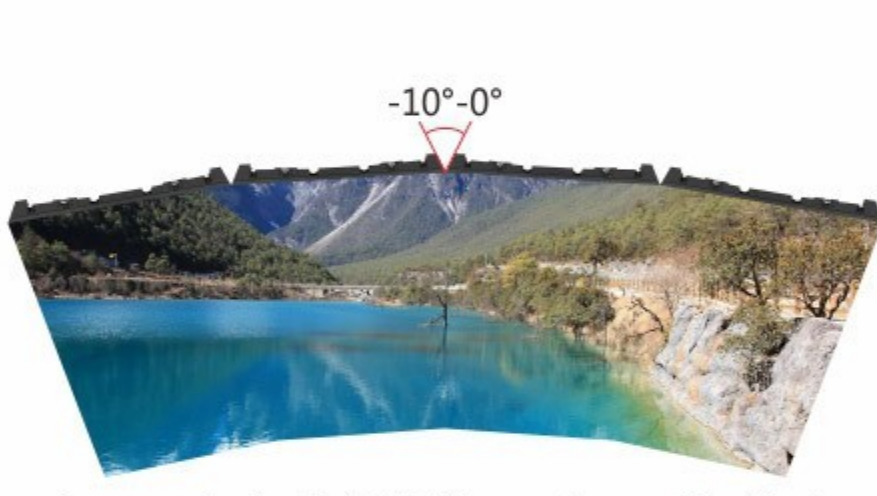


Concave Angle: 0°-10°(2.5°/pcs, only curved cabinet)



Legend series support composite installation and mixed installation.



The cabinets can be connected and fitted in dollies, which speeds up installation significantly.

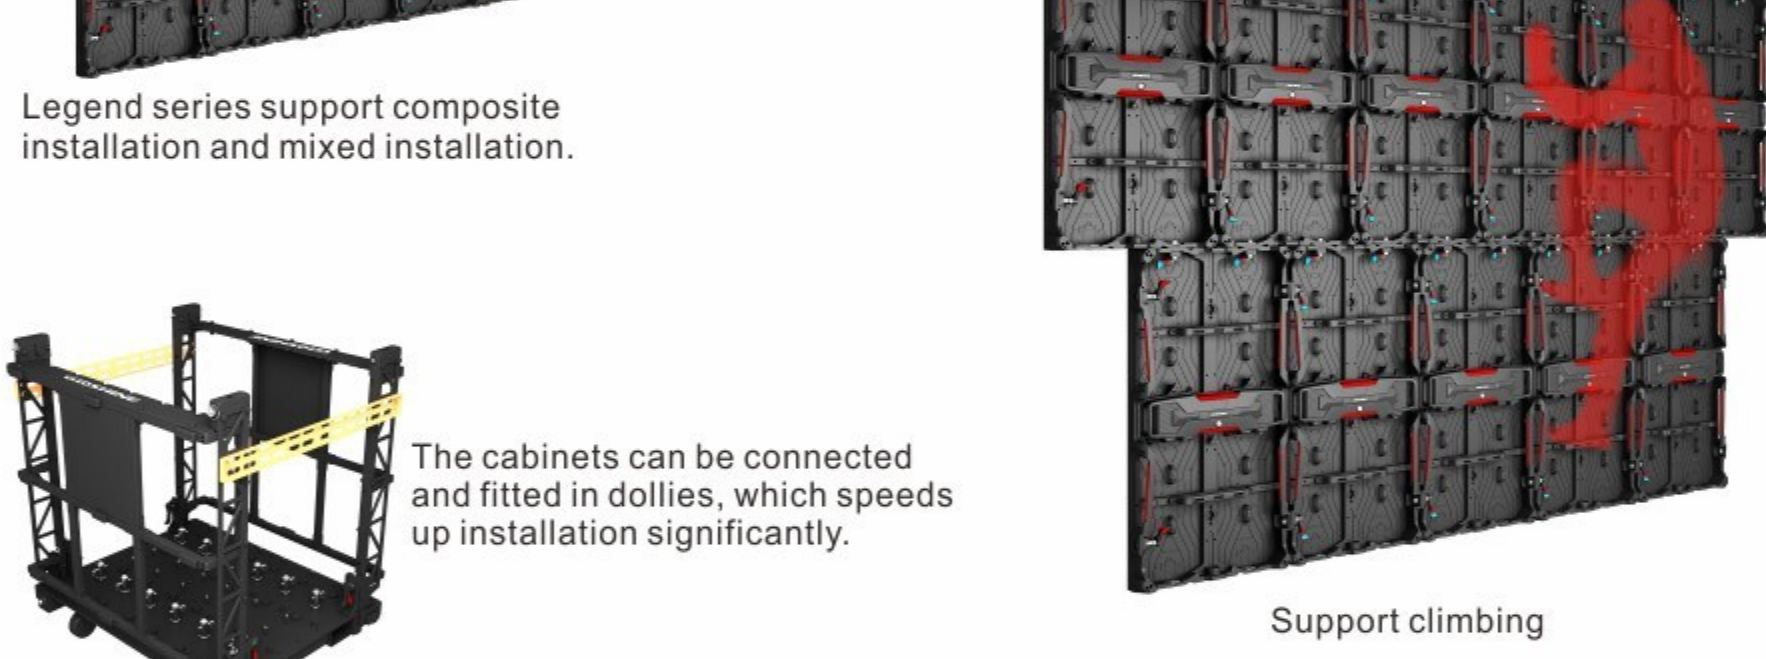

Support climbing



<Rear Access>

To adapt to a variety of installation environment, fast maintenance, improve operating efficiency.



X6Pcs

• Loading: 6 pcs in 1

• Safety and reliable

• Strong loading

• Eco-friendly material

• Anti-electrostatic



Model No.	Legend 4.81(Outdoor)	
Pixel Pitch	4.81mm	
LED	SMD1921	
Pixel Density	43264pixel/m ²	
Brightness	5000-6000nits	
Color Temperature	6500-9500K	
Scan	1/13 (1/7 scan optional)	
Panel Dimension(W*H*D)	500X1000X86mm/19.7"X39.4"X3.4"	
Panel Resolution	104X208pixel	
Panel Weight	12.9kg/28.44lb	
Cabinet Material	Magnesium alloy	
Max Power Consumption	≤800w/m ²	
Average Power Consumption	≤400w/m ²	
Viewing Angle	H:160° V:140°	
Refresh Rate	3840Hz	
Gray Scale	14-16bit	
IP Rating	Front IP65,Rear IP54	
Operating Humidity	10%-90%RH	
Operating Temperature	-20°C~+45°C	
Max. Stacking	12pcs	
Max. Hanging	12pcs	
Curve(Optional)	-10°/-7.5°/-5°/-2.5°/0°/2.5°/5°/7.5°/10°	
Lifetime	50,000hrs	
Storage Temp/Humidity	-40°C~+60°C;10%-60%RH	