

**PIU39** 

21.5 inch Hand Sanitizing

Android 46 4G

Full HD 1080P

**LCD Digital Signage** 

Wifi





Advertising Revenue, build your own media

Reselling to the retailers, or advertise for your

Renting, set up the products in airport, hospital,

school, shopping mall and charge for the advertisement;

network throughout the country;


own store:

Remote Content Management Software

The content management system (CMS) allow you to log

in from PC to update, scheduleand manage all the

dispensers on your work.

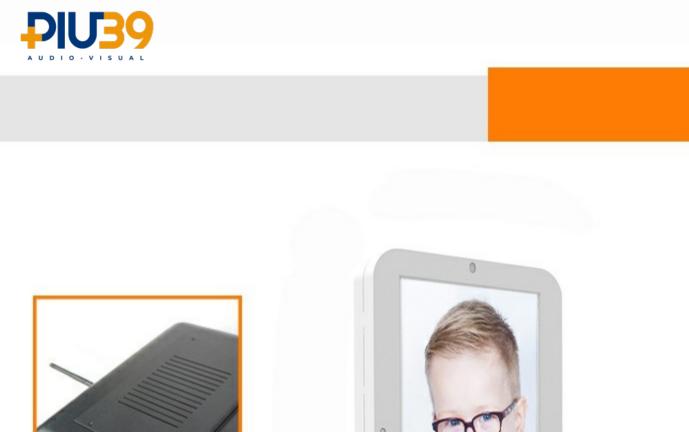



Restaurant Bar

Airport

O S C

Hospital

6. Operating system: OS Android 7.1.1 Build in Google play in system

1. CPU: 4 core Cortex-A17, 1.8GHZ

- the resolution 4096\*4096 **Working Environment** 
  - Temperature: Working temperature: 0°C~50°C Storage temperature: -20°C~60°C
- Power supply:
- Outer shell:
- Maximum power consumption: 50W
- **Specification** 1. Size of Screen: 21.5 inch 2. Panel Brand: Original Full New 100% A+ Grade Brand Panel 3. Using Life: 50000 hours Display ratio:16:9 5. Resolution:1920\*1080 FHD 6. Viewing angle:178°/178°(H/V) 7. Color:16.7M 8. Backlits:LED 9. Brightness:250nits 10. Contrast: 1500:1 11. No touch (PCAP touch optional) 12. Build USB camera on the top of the screen 13. Build the IR sensor in the side of the screen to detect the temp of wrist & forehead 5cm or 60cm version 14. With Automatic Hands sanitizer dispenser build in, capacity of 1000ml hand soap maximum

Technique Parameter for LCD Panel

DDR: DDR3 2G 4. ROM NAND FLASH: 8G 5. Exteral ROM Support up to 32G bytes sd card

GPU: ARM Mali-T764 GPU

Android solution

- 3. Surface finishing: heavy industrial grade of powder coating with an anti-wear texture
- 7. Video playing: Support: AVI (H.264、DIVX、DIVX、XVID), rm, rmvb, MKV (H.264, DIVX, DIVX, XVID), WMV, MOV, MP4 (.H.264, MPEG, DIVX, XVID), DAT (VCD format), VOB (DVD format), PMP,MPEG, .MPG,, FLV (H.263, H.264), ASF, TS, TP, 3GP, MPG..etc 8. Video Resolution Up to 3840\*2160 9. Support:MP3,WMA,MP2,OGG,AAC,M4A,MA4,FLAC,APE,3GP, WAV. 10. Additional: Photo format: JPG、BMP、PNG、GIF..etc up to
  - Industiral High level Power moduel AC100~240V 50 /60 HZ
  - Standby power consumption: <3W 1. Main outer shell is made by extra quality Iron material 2. With a protection layer of high-penetrating Tempered glass (with 3mm-4mm thickness) on the surface of the LCD Panel.